
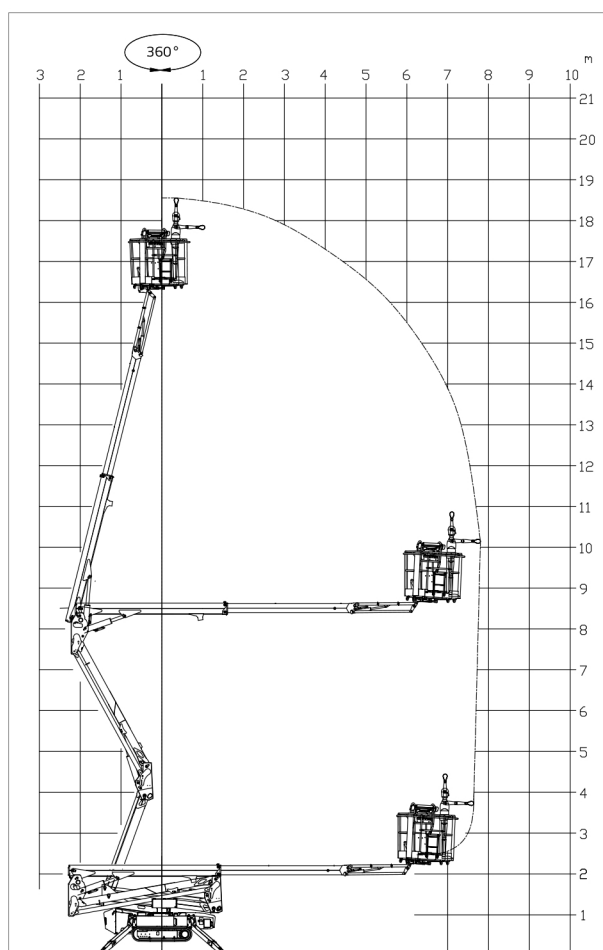


LL18.80

Hinowa
 the future is now

CAPACITY 230 KG
 (2 persons 80x2=160 kg + tool box 70 kg)


18,55 m

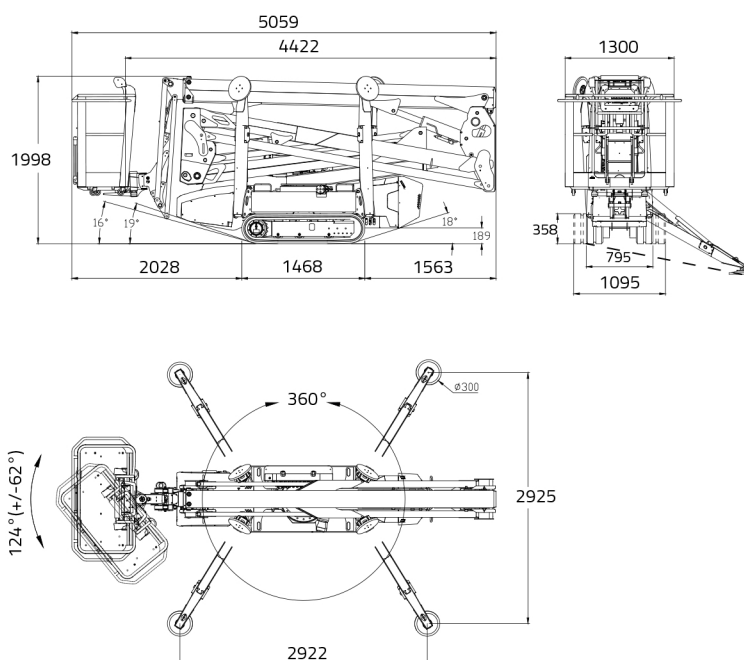

7,80 m



5,05 m



4,42 m



1,99 m



1.335 x 690 x h. 1.100 mm



124° (+/-62°)



16° / 28,7%



795 - 1095 mm



1795 daN - 2,5 daN/cm²



2922 x 2925 mm



Automatic set up system IIIS std.



Remote control



GPRS-GPS



R.A.H.M.

Lithium-ion battery pack
7,7 kWhBi-energy (Diesel + Lithium-ion
battery pack)



TECHNICAL SHEET

 PERFORMANCE *III* S

LL18.80


PETROL ENGINE

Brand.....HONDA
 TypeGX390
 Pistons no. and displacement.....
single-cylinder 389 cm³
 Max gross power
 11,7HP - 8,7 kW @ 3600 rpm (GX390)
 Electrical start..... 12 volt

DIESEL ENGINE

Brand.....KUBOTA
 TypeZ602
 Pistons no. and displacement.....
double-cylinder 599 cm³
 Max gross power
 14,5 HP - 10,8kW @ 3600 rpm
 Electrical start..... 12 volt

LITHIUM-ION SYSTEM

Lithium-ion powered 7,7 kWh
 Onboard battery charger
220V 50Hz or 110V 50Hz
 Autonomy..... 4-5 h
 Recharge time on flat batteries
4 h (indicative)
 Recharge time to 80% on flat batteries.
 2 h (indicative)

HYDRAULIC PUMPS

Electric motor no. 2 gear pumps

TRACKED UNDERCARRIAGE

Track tensioner grease-filled
 Rollers no. per side 3 + slide

Translation speed with 3rd auto2speed:

- petrol engine 0,4 - 1 - 1,95 km/h
 - diesel engine 0,5 - 1,3 - 2,5 km/h
 - lithium system..... 0,83 - 1,6 km/h

WEIGHT MACHINE petrol engine 2780 kg
 WEIGHT MACHINE diesel engine 2830 kg
 WEIGHT MACHINE lithium-ion..... 2880 kg
 WEIGHT MACHINE bi-energy 2990 kg

MAX WIND SPEED..... 12,5 m/s