


Specifications:

Working Height:	200kgs (2 men) to 24m
Min. Jacked Width (to outside of Jack-feet):	3.4m
Max. Jacked Width (to outside of Jack-feet):	5.1m
Horizontal Work Reach*:	(approx.) 11.5m
Cage Size (2 man):	0.71m x 1.2m
Stowed Width without Cage:	0.80m
Stowed Height	1.98m
Stowed Length	6.20m
Wheelbase:	2.30m
Tyres:	Heavy-duty Pneumatic
Power:	Battery/Mains 240V


Gross Vehicle Weight:	2950kgs
Max. Weight on any one Outrigger+:	1800kgs
Loadings on Front Wheel:	900kgs
Loadings on Front Axle:	900kgs
Loadings on each Rear Wheel	1100kgs
Loadings on Rear Axle:	2200kgs

+ When Cage & Boom are fully extended exactly over that Outrigger with Maximum safe working load.


* Note Outreach varies according to Jack-spread & Cage Loading.

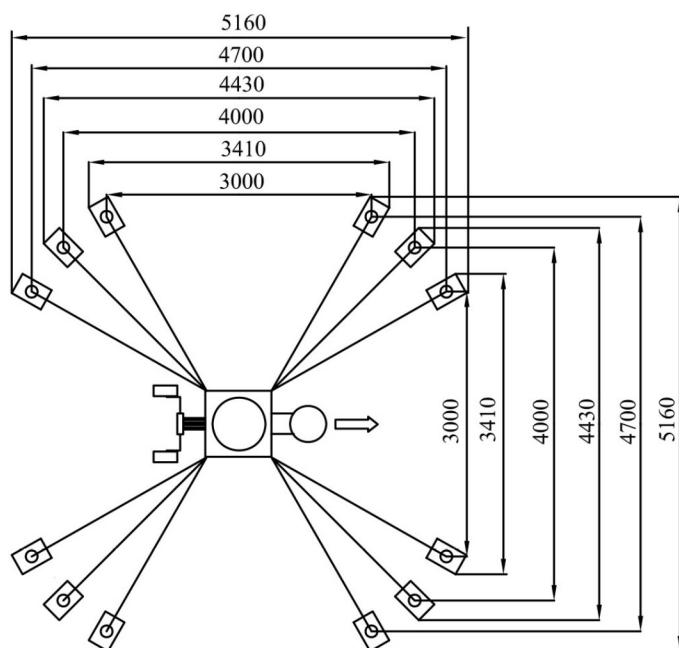

Measurement (when undercarriage is not elevated)



Optimized position



Standard position

22200

